




DCP360+

DIRECT CARD PRINTER

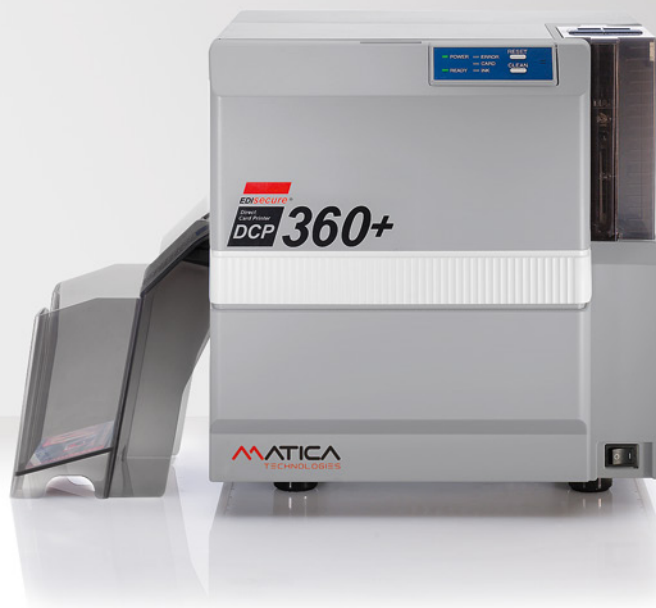

DCP360+

DIRECT CARD PRINTER

The modern-designed, double-sided, edge-to-edge *EDIsecure*® DCP360+ Professional Direct Card Printer was developed for industrial needs and is prepared for plug and play inline lamination. With its versatility and state-of-the-art features the robust DCP360+ is the most powerful desktop card printer in the world. The unconventional portrait mode printing engine shortens card feeding path and achieves an extremely impressive print speed of 19 seconds per card (single side), which allows to print more than 180 full-color cards per hour.

The DCP360+ is ready to grow with your demands and raises you to a higher quality of ID card printing that exceeds all your expectations in a direct card printer. Large capacity card input and output hopper allows for easy use, even overnight without operator supervision. The detachable card input hopper gives you the choice of exchanging easily the whole hopper or simply adding more cards during operation. A powerful printer driver helps you route and control your print jobs.

The field upgradeable encoder modules for magnetic stripe as well as contact and contactless smart card encoding options help to protect your organization and investment. Extend the lifetime and security of your cards by adding a lamination module to the printer. The *EDIsecure*® ILM or ILM-DS for single and simultaneous dual-side lamination speeds up the lamination process without the need of an external flipper unit.

The DCP360+ delivers the right combination of reliability, performance and affordability for printing more secure, more durable ID cards.

TECHNICAL SPECIFICATIONS

Print Method

Color dye-sublimation and monochrome thermal transfer

Print Mode

Double-sided edge-to-edge direct card printing

Print Speed

Full color: more than 180 cards per hour (single-sided)

Monochrome: up to 720 cards per hour (single-sided)

Print Resolution

300 dpi

Printhead

Operator replaceable, 24 month warranty, no count limitation using *EDIsecure*® Cards

Card Types

All PVC and Composite PVC Cards of ISO ID-1/CR-80 size, 85.60 x 53.98 mm

Card Thickness

0.25 – 1.02 mm

Input Hopper Capacity

100 cards (0.76 mm)

Output Hopper Capacity

100 cards (0.76 mm)

Memory

2 x 8 MB

Interface

USB 2.0

Operating System Support

Windows 2000, Windows XP, Windows Vista, Windows 7

Printer Dimensions

299 x 311 x 308 mm (WxDxH)

Weight

12 kg

Power Supply

100/120 V and 220/240 V, 50/60 Hz

FCC, CE, UL, GOST-R, and CCC approved

Operating Environment

15°C to 30°C, 35% to 70% non-condensing humidity